## **SIEMENS**

Data sheet 3RU2116-0JB0



Overload relay 0.70...1.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	4.8 W
• per pole	1.6 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	0.7 1 A
operating voltage	
rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	1 A
operational current at AC-3e at 400 V rated value	1 A

operating power	
• at AC-3	
— at 400 V rated value	0.25 kW
— at 500 V rated value	0.37 kW
— at 690 V rated value	0.55 kW
• at AC-3e	
— at 400 V rated value	0.25 kW
— at 500 V rated value	0.37 kW
— at 690 V rated value	0.55 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	D000 / 1000
	CLASS 10
trin clace	CLASS 10
trip class	thermal
design of the overload release	thermal
design of the overload release UL/CSA ratings	thermal
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value	1 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection	1 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link	1 A 1 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required	1 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	1 A 1 A fuse gG: 6 A, quick: 10 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position	1 A 1 A fuse gG: 6 A, quick: 10 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method	1 A 1 A fuse gG: 6 A, quick: 10 A any Contactor mounting
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	1 A 1 A 1 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit	1 A 1 A 1 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current	1 A 1 A 1 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit	1 A 1 A 1 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	1 A 1 A 1 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts	1 A 1 A 1 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts — solid or stranded	1 A 1 A 1 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts  — solid or stranded  — finely stranded with core end processing	1 A 1 A 1 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)

<ul> <li>for auxiliary contacts</li> </ul>	
<ul><li>— solid or stranded</li></ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
<ul> <li>for auxiliary contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 6 mm
size of the screwdriver tip	Pozidriv PZ 2
design of the thread of the connection screw	
<ul> <li>for main contacts</li> </ul>	M3
<ul> <li>of the auxiliary and control contacts</li> </ul>	M3
Safety related data	
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
MTTF with high demand rate	2 280 a
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Slide switch
Certificates/ approvals	

**General Product Approval** 

For use in hazardous locations



Confirmation









**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping





Type Test Certificates/Test Report

**Special Test Certific-**<u>ate</u>





Marine / Shipping









Household and similar appliances

other

other

Railway

Confirmation

Vibration and Shock

Siemens has decided to exit the Russian market (see here).

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-0JB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-0JB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <a href="https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-0JB0">https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-0JB0</a>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RU2116-0JB0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-0JB0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-0JB0&objecttype=14&gridview=view1

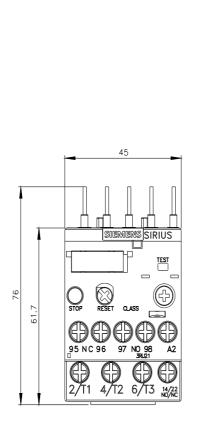

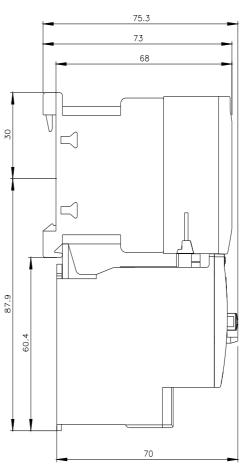

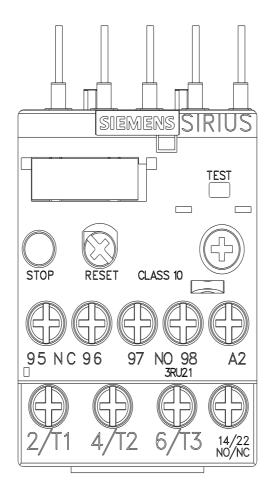

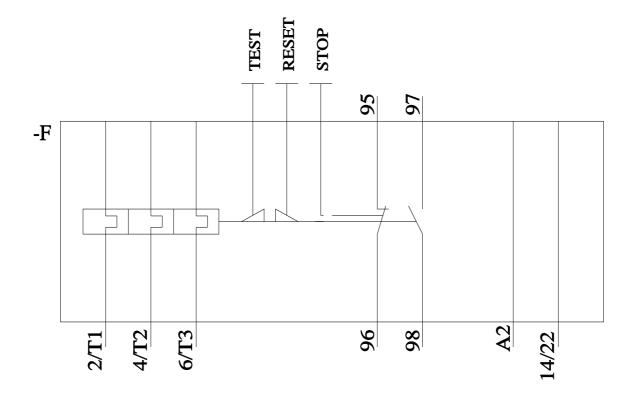

last modified: 9/5/2023 🖸