

Accessory 3WA/3WL instantaneous (0,08 s) and short-delay (0,2 s), 110-127 V AC / 110-125 V DC,

Model			
product brand name	SENTRON		
product designation	Undervoltage release		
design of the product	undervoltage release (UVR), instantaneous (0.08 s) and short-time delayed (0.2 s), 110 to 127 V AC / 110 to 125 V DC		
closing apparent power [VA]	50 VA		
operating apparent power [VA]	5 VA		
closing active power [W]	50 W		
operating active power [W]	5 W		
OFF-delay time minimum	80 ms		
OFF-delay time maximum	200 ms		
opening time of circuit breaker at $U_s = 0\%$	73 ms		
control supply voltage ( $U_s$ ) at AC rated value	110 to 127 V 50/60 Hz		
design of the DIAZED fuse link gG/miniature circuit breaker with tripping characteristic class C 100% for short-circuit protection minimum permissible	1 A		
ambient temperature during operation			
• minimum	-40 °C		
• maximum	70 °C		
ambient temperature during storage			
• minimum	-40 °C		
• maximum	80 °C		
<b>General Product Approval</b>	<b>EMC</b>	<b>Declaration of Conformity</b>	<b>Test Certificates</b>

[Confirmation](#)



[Special Test Certificate](#)

**Test Certificates**

**Marine / Shipping**

**other**

**Dangerous Good**

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



LRS

[Confirmation](#)

[Dangerous Goods Information](#)

### Further information

Siemens has decided to exit the Russian market (see here).  
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AE05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AE05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA9111-0AE05](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AE05)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

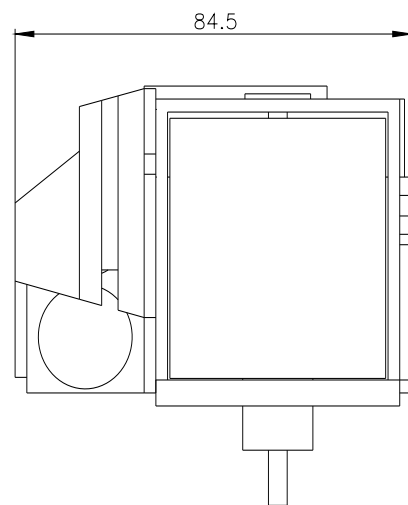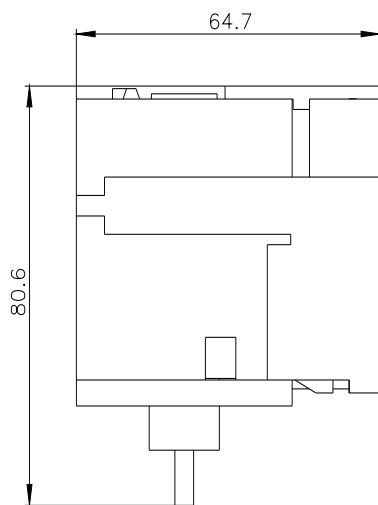

last modified:

8/12/2023 

